

Absolute-Encoder CEV582 - SSI



Order No.: K-CEV58_2-SSI-1
20.06.2026
010102058202010201

Advantages

- _ Compact industry standard
- _ Option: +INC
- _ Parameterizable gear unit
- _ Salt water resistant

General Data

Nominal voltage	
- Specific value	24 VDC
- Limit values, min/max	10/30 VDC
Nominal current, typically	
- Specific value	45 mA
- Condition	unloaded
Supply	
- In case of UL / CSA approval	according to NEC Class 2
Device design	
- Type	Single-/Multi-Turn
Total resolution	<= 33 Bit
Number of steps per revolution	<= 32768
Number of revolutions	<= 256000
Output capacity	<= 30 Bit

Änderungen vorbehalten.

TR-Electronic GmbH
Eglishalde 6
78647 Trossingen
Tel. +49 (0) 7425 228-0
info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CEV582 - SSI

Order No.: K-CEV58_2-SSI-1
20.06.2026
010102058202010201

General Data

SSI - Interface	
- SSI-Clock input	Optocoupler
- SSI-Data output	RS-422, 2-wire
- SSI-Clock frequency	80... 1000 kHz
- SSI-Mono time, typically	9... 41 µs
- SSI-Mono time, typically	20 µs
- Output code	Binär, Gray, Gray clipped
- Number of data bits	1... 64
- Type of parametrization	programmable
Incremental - Interface	
- Equipment	Optional interface
- Signal form	Square wave
- Incremental signals, square	K1± K2± K0±
- Impulses, square wave	2... 65536
- Output driver, TTL	RS-422, 5 VDC
- Output driver, HTL	Push-Pull, Supply Voltage
- Type of parametrization	programmable
- Output frequency	<= 150 KHz, HTL
- Output frequency	<= 300 KHz, TTL
Cycle time	125 µs
Preset writing cycles	>= 1 000 000
Parameter/Function, changeable	Resolution
	Output code
	Output format
	Number of data bits
	Movement status signal
	Limit switch
	Error signal
	Mono time
	Offset
	Preset parameter
	Parity
	Direction signal
	Special bits
	Overspeed
	Sign

Änderungen vorbehalten.

TR-Electronic GmbH
Eglishalde 6
78647 Trossingen
Tel. +49 (0) 7425 228-0
info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CEV582 - SSI

Order No.: K-CEV58_2-SSI-1
20.06.2026
010102058202010201

General Data

	Counting direction
	Gear function
Type of parametrization	programmable
Programming - Tool	TR-Soft: TRWinProg
External inputs	
- F/R	Count direction
- Preset	electronic adjustment
- Logic level	"0" < +2V, "1" = Supply
Maximum Speed, mechanically	<= 12000 1/min
Shaft load, axial/radial	<= 50 N, <= 100 N
Bearing life time	>= 3.9E+10 revolutions
Bearing life time - Parameter	
- Speed	6000 1/min
- Operating temperature	60 °C
- Shaft load, axial/radial	= 60 %
Point of origin, shaft load	Mounting flange + 10 mm
Shaft type	
- Shaft diameter [mm]	6
- Shaft diameter [mm]	8
- Shaft diameter [mm]	10
- Shaft diameter [mm]	12
- Shaft diameter ["]	1/4
- Shaft diameter ["]	3/8
- Shaft diameter ["]	1/2
Angular acceleration	<= 1.0E+5 rad/s ²
Moment of inertia, typically	1.3E-6 kg m ²
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.3...0.5 kg

Environmental conditions

Vibration	DIN EN 60068-2-6
- Specific value	<= 100 m/s ²
- Sine	50...2000 Hz
Shock	DIN EN 60068-2-27



Änderungen vorbehalten.

Absolute-Encoder CEV582 - SSI

Order No.: K-CEV58_2-SSI-1
20.06.2026
010102058202010201

Environmental conditions

- Specific value	$\leq 1000 \text{ m/s}^2$
- Half sine	6 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	-20...+75 °C
- Optional	-40...+85 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
- Optional	extended to IP67
Resistance	
- against salt (seawater)	DIN EN IEC 60068-2-52
- Test method	Test method 1
- excluded are	Attachment parts

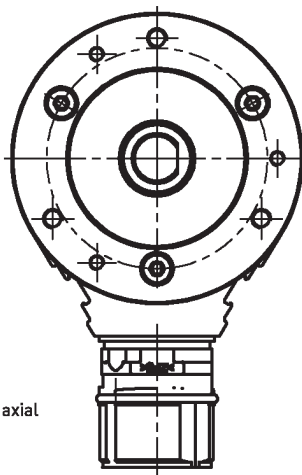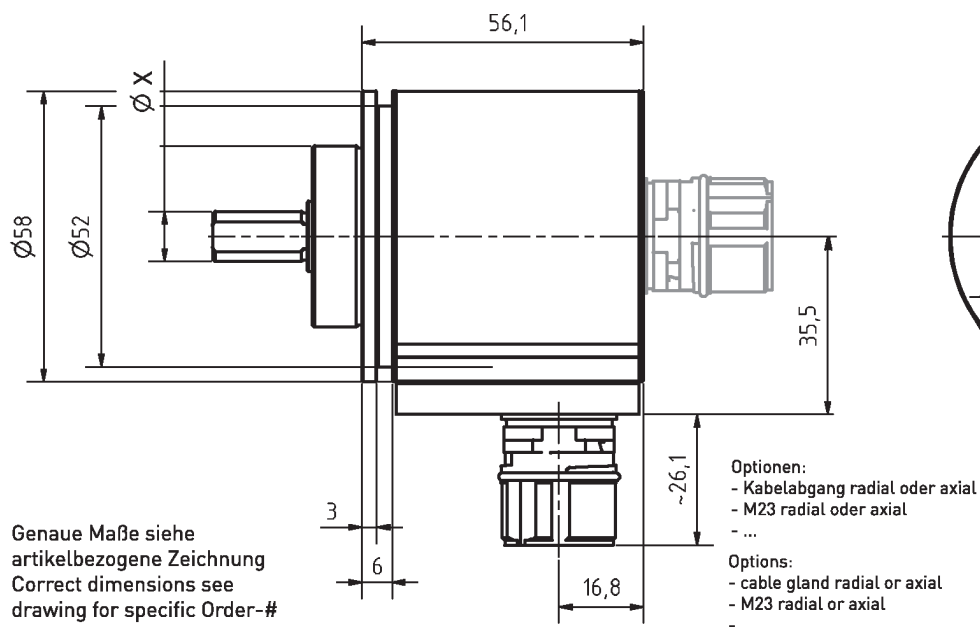

Änderungen vorbehalten.