

Absolute-Encoder CEV582 - Analog



Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

Advantages

- Current- or voltage output
- Option: +SSI or +INC
- Option: Remote Teach-in
- Output of speed or position
- Teach-in via push button

General Data

Nominal voltage	
- Specific value	24 VDC
- Limit values, min/max	10/30 VDC
Nominal current, typically	
- Specific value	100 mA
- Condition	unloaded
Supply	
- In case of UL / CSA approval	according to NEC Class 2
Device design	
- Type	Single-/Multi-Turn
Total resolution	≤ 33 Bit
Number of steps per revolution	≤ 32768
Number of revolutions	≤ 256000
SSI - Interface	
- Equipment	Optional interface

Änderungen vorbehalten.

Absolute-Encoder CEV582 - Analog

Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

General Data

- SSI-Clock input	Optocoupler
- SSI-Data output	RS-422, 2-wire
- SSI-Clock frequency	80... 1000 kHz
- SSI-Mono time, typically	4... 999 µs
- Output code	Binär, Gray, Gray clipped
- Number of data bits	1... 64
- Type of parametrization	programmable
Incremental - Interface	
- Equipment	Optional interface
- Signal form	Square wave
- Incremental signals, square	K1± K2± K0±
- Impulses, square wave	1...36000
- Output driver, TTL	RS-422, 5 VDC
- Output driver, HTL	Push-Pull, Supply Voltage
- Type of parametrization	programmable
Analog - Interface	
- Voltage/Current	programmable
- Resolution	16 Bit D/A converter
- Voltage output	0... +10 VDC
- Voltage output	-10... +10 VDC
- Load resistance (U)	>= 0.5 kOhm
- Current output	0... 20 mA
- Current output	4... 20 mA
- Load resistance (I)	<= 300 Ohm
- Analog output	Position
- Analog output	Speed
Preset writing cycles	>= 1 000 000
Parameter/Function, changeable	Analog Voltage/Current
	Operating range
	Function inputs
	Function button
	Preset parameter
	Adjustment - Parameter
	Scaling parameter
	Interface parameter
	Counting direction

Änderungen vorbehalten.

TR-Electronic GmbH
Eglishalde 6
78647 Trossingen
Tel. +49 (0) 7425 228-0
info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CEV582 - Analog

Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

General Data

	Gear function
	Velocity parameter
Type of parametrization	programmable
Programming - Tool	TR-Soft: TRWinProg
Maximum Speed, mechanically	≤ 12000 1/min
Shaft load, axial/radial	≤ 50 N, ≤ 100 N
Bearing life time	$\geq 3.9E+10$ revolutions
Bearing life time - Parameter	
- Speed	6000 1/min
- Operating temperature	60 °C
- Shaft load, axial/radial	= 60 %
Point of origin, shaft load	Mounting flange + 10 mm
Shaft type	
- Shaft diameter [mm]	6
- Shaft diameter [mm]	8
- Shaft diameter [mm]	10
- Shaft diameter [mm]	12
- Shaft diameter ["]	1/4
- Shaft diameter ["]	3/8
- Shaft diameter ["]	1/2
Angular acceleration	$\leq 1.0E+5$ rad/s ²
Moment of inertia, typically	1.3E-6 kg m ²
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.3 kg

Environmental conditions

Vibration	DIN EN 60068-2-6
- Specific value	≤ 100 m/s ²
- Sine	50...2000 Hz
Shock	DIN EN 60068-2-27
- Specific value	≤ 1000 m/s ²
- Half sine	6 ms
Immunity to disturbance	DIN EN 61000-6-2

Änderungen vorbehalten.

Absolute-Encoder CEV582 - Analog

Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

Environmental conditions


Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	-20...+75 °C
- Optional	-40...+85 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
- Optional	extended to IP67
Resistance	
- against salt (seawater)	DIN EN IEC 60068-2-52
- Test method	Test method 1
- excluded are	Attachment parts

Änderungen vorbehalten.


Absolute-Encoder CEV582 - Analog

Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

Radial

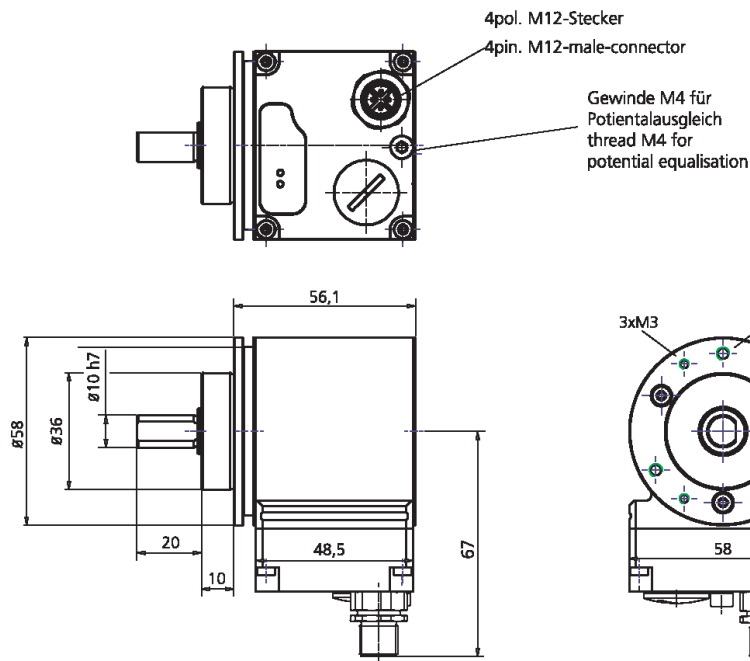

Axial

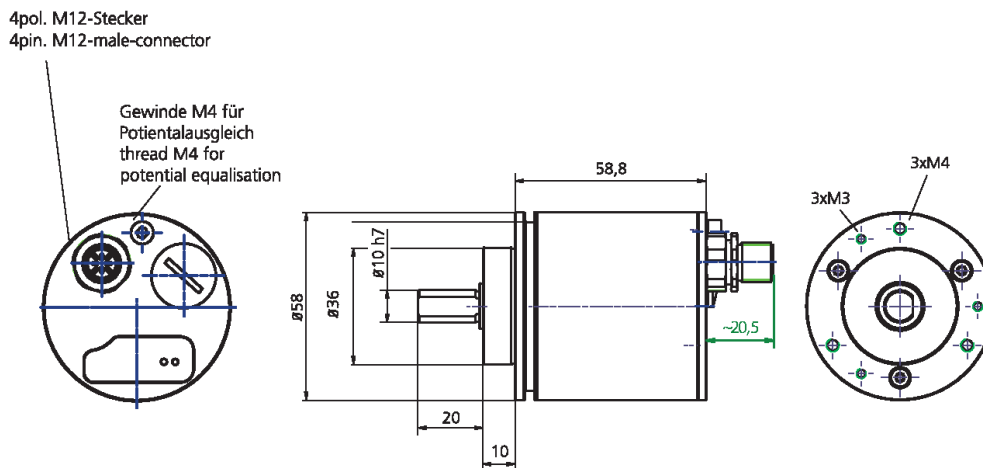

Fehlende Abmaße, siehe Art.-Nr. bezogene Zeichnung /
Missing dimensions, see drawing related to the order number

Änderungen vorbehalten.

Absolute-Encoder CEV582 - Analog

Order No.: K-CEV58_2-A-1
20.06.2026
010102058202010201

Änderungen vorbehalten.